



P.O. Box "J"
MANSON, WASHINGTON 98831
PHONE: (509) 687-3548
STAFF@LCRD.ORG

SERVICE ID: _____

APPLICATION FOR DOMESTIC WATER HOOK-UP

NAME: _____

PARCEL#: _____

MAILING ADDRESS: _____

PHONE NUMBER: _____

E-MAIL: _____

TYPE OF SERVICE:

- SINGLE FAMILY RESIDENCE
- ACCESSORY DWELLING UNIT (ADU)
- COMMERCIAL BUILDING
- DUPLEX/TRIPLEX/MULTI
- OTHER: _____

PROPERTY ADDRESS: _____

WHAT DATE WOULD YOU LIKE THE METER SERVICE INSTALLED BY? _____

* IF A METER BOX IS NOT ALREADY PRESENT, PLEASE USE A STAKE LABELED "WATER" TO MARK YOUR DESIRED LOCATION AND ATTACH A PARCEL MAP TO THIS FORM SHOWING ITS LOCATION. LCRD REQUIRES **30 DAYS ADVANCE NOTICE** PRIOR TO SERVICE INSTALLATION.

CUSTOMER ACKNOWLEDGES AND AGREES TO THE FOLLOWING BY SIGNING THIS DOCUMENT:

1. THE CUSTOMER WILL HAVE THE BACKFLOW PREVENTION ASSEMBLY (DCVA) INSPECTED AND TESTED ANNUALLY AT YOUR OWN COST AS REQUIRED BY THE DEPARTMENT OF HEALTH WAC 246-290-490.
2. THE CUSTOMER HAS READ THE BROCHURE ON HOW TO PREVENT THERMAL EXPANSION AND ACKNOWLEDGES THAT LCRD RECOMMENDS THE INSTALLATION OF THERMAL EXPANSION TANK.
3. THE CUSTOMER UNDERSTANDS THAT INSULATING THE METER AND DCVA BOX DURING THE WINTER MONTHS IS YOUR RESPONSIBILITY. LCRD RECOMMENDS PLACING INSULATION IN A GARBAGE BAG, TO KEEP IT FROM GETTING WET, AND PLACING IT BELOW AND ABOVE THE DCVA IN EFFORT TO PREVENT IT FROM FREEZING.
4. HIGH PRESSURE: IN ORDER TO PROVIDE WATER SERVICE TO ALL AREAS OF OUR DISTRICT, SOME SERVICES WILL HAVE HIGH WATER PRESSURE AND WILL NEED TO INSTALL A PRESSURE REDUCING VALVE (PRV) ON THE MAIN WATER LINE.
5. LOW PRESSURE ZONE: LCRD IS REQUIRED TO PROVIDE A MINIMUM OF 30 PSI AT THE METER, WHICH IS LOCATED AT THE EDGE OF YOUR PROPERTY. A PRIVATE BOOSTER PUMP SYSTEM WILL BE NEEDED IF THE PSI AT YOUR HOUSE IS NOT ADEQUATE. YOU ARE RESPONSIBLE FOR PROVIDING POWER FOR THE PRIVATE PUMP AND MAINTAINING IT.

CUSTOMER SIGNATURE: _____

DATE: _____

NOTE: MONTHLY RATE SERVICE FEES WILL START 30 DAYS AFTER THE WATER METER IS INSTALLED REGARDLESS OF WHETHER YOU ARE PHYSICALLY USING THE WATER OR NOT. THE HOOK UP FEE WILL INCLUDE THE INSTALLATION OF A 3/4" METER, 3/4" DOUBLE CHECK VALVE ASSEMBLY AND A BLANK BALL VALVE WHICH IS THE CUSTOMER'S SHUT OFF VALVE.

HOOK UP FEE (PER ERU) \$6,500 x _____ ERU's
 ADU HOOK UP FEE (.5 ERU) \$3,250 x _____ ERU's
 TAP FEE \$1,250
 ROAD CROSSING FEE \$2,000
 DCVA INSTALL FEE \$1,000
 MISC FEES/LATECOMERS: \$ _____
TOTAL AMOUNT DUE: \$ _____

AMOUNT RECEIVED: _____

CHECK NUMBER: _____

DATE PAID: _____

RECEIVED BY: _____

LAKE CHELAN RECLAMATION DISTRICT

HOOK UP COMPLETED ON: _____

HOOK UP BY: _____

AMR TRANSMITTER NO: _____


BACKFLOW SERIAL: _____

METER BODY SERIAL: _____

BACKFLOW MAKE/MODEL: _____

CHLORINE RESIDUAL TEST RESULT: _____ MG/L

BACKFLOW SIZE: _____

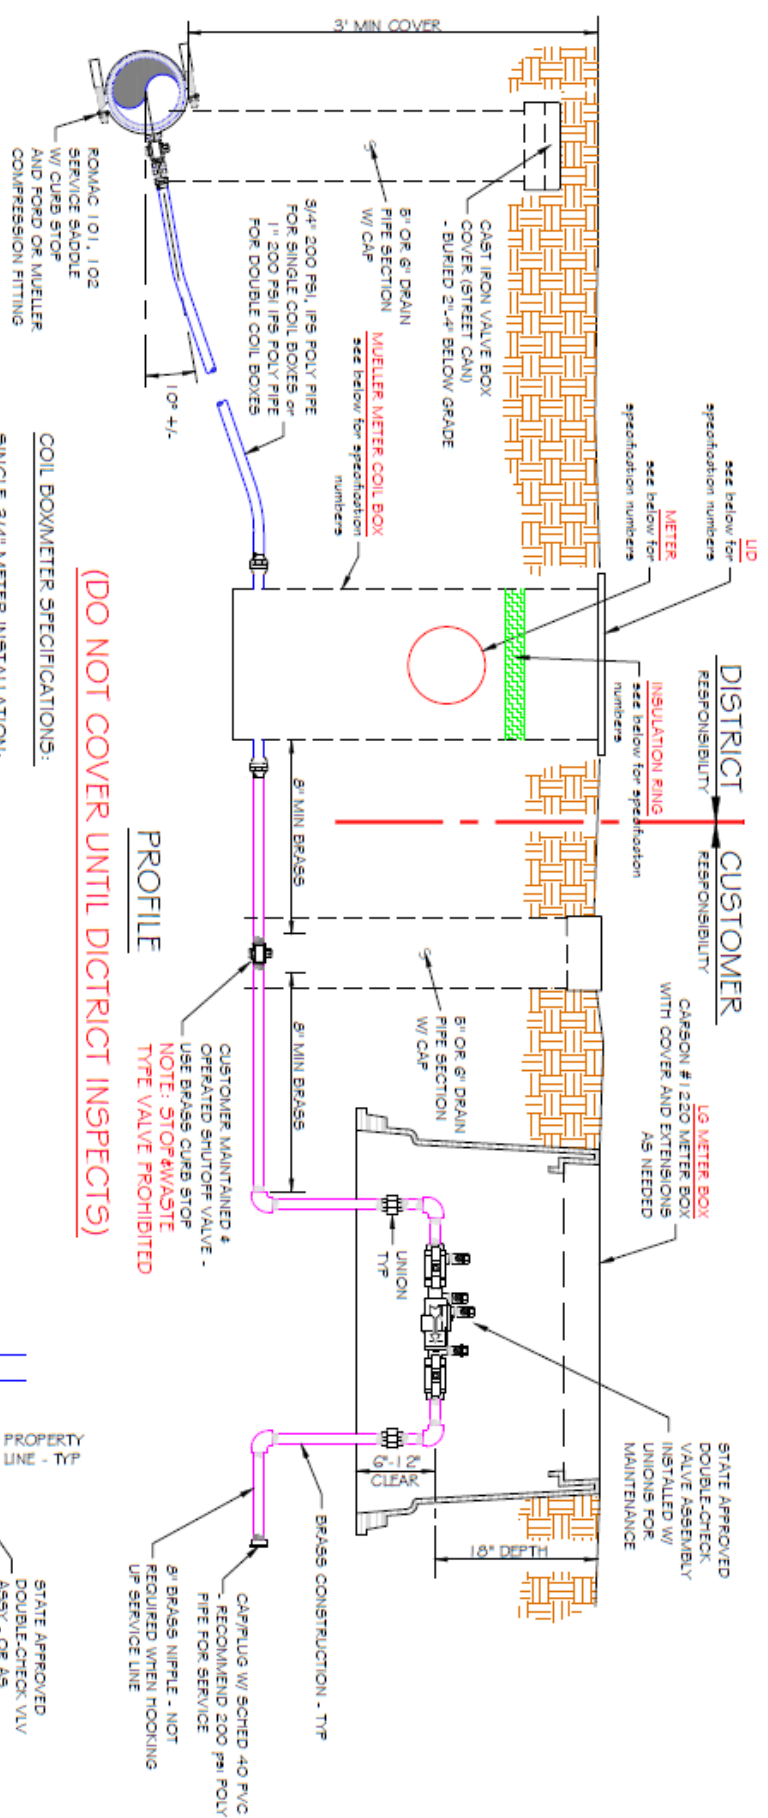

CUSTOMER
INITIAL: _____

NOTES:
ALL DOMESTIC DEVICES AND FITTINGS MUST BE LEAD FREE.

MATERIAL SUBSTITUTIONS OR DETERMINATION OF EQUAL ARE AT THE SOLE DISCRETION OF LAKE CHELAN RECLAMATION DISTRICT.

SERVICE LINE TO BE 90° OFF MAIN LINE.
MAGNETIC TAPE TO BE BURIED OVER SERVICE LINE FOR LOCATION.

(DO NOT COVER UNTIL DISTRICT INSPECTS)


COIL BOX/METER SPECIFICATIONS:

- SINGLE 3/4" METER INSTALLATION:**
 METER - 5/8" x 3/4" Badger Recordall Nutating Disc Flowmeter, LL Bronze External Thread Body, Nylon Chamber, Plastic Thrust Roller, Bronze Bottom, Meter Mounted Low Temp Register, No Connections, NSF G1, Cubic Feet Reader
 COIL BOX - Mueller No. 250 CS 15 3G LBD5N
 LID - Mueller No. 790007
 INSULATION RING - Mueller No. 790022

- DOUBLE 3/4" METER INSTALLATION:**
 (2) METERS - see single 3/4" meter installation above
 COIL BOX - Mueller No. 250 CD 15 3G LBD5N
 LID - Mueller No. 790015
 INSULATION RING - Mueller No. 790153

SINGLE 1" METER INSTALLATION:

- METER - 1" Badger Recordall Nutating Disc Flowmeter, LL Bronze External Thread Body, Nylon Chamber, Plastic Thrust Roller, Bronze Bottom, Meter Mounted Low Temp Register, No Connections, NSF G1, Cubic Feet Reader
 COIL BOX - Mueller No. 330 CS 15 3G LBD5N
 LID - Mueller No. 790015
 INSULATION RING - Mueller No. 790153

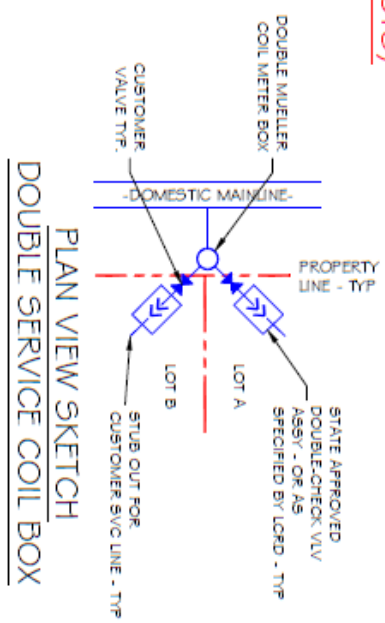

PLAN VIEW SKETCH
DOUBLE SERVICE COIL BOX

<p>TITLE: DOMESTIC WATER SERVICE w/ DCVA - CONTRACTOR VS STANDARD DOMESTIC DETAIL</p>	<p>SHEET: 20B OF SET</p>
<p>DWG SCALE: NO SCALE</p>	<p>NO SCALE</p>



DRAWN BY: RLK